


ONE powersource gives multiple choice...



- in high quality tools for professionals!

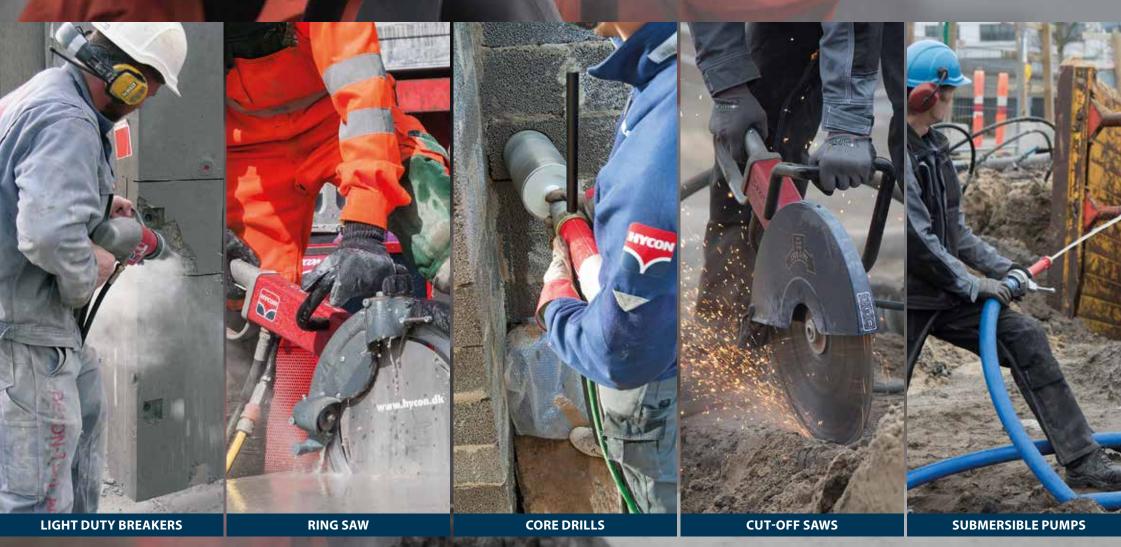

HYCON hydraulic tools and powerpacks are the choice of professionals.

For the expert, who values high performance and reliability, operator comfort and easy service. Furthermore, HYCON is ONE hydraulic system with only ONE power source: THE HYCON POWERPACK



If you have never tried hydraulic breakers, tools or powerpacks, the explanation is often quite simple: You know what you have, and you probably feel a little insecure by changing to hydraulics. The force of habit is guite understandable - and we know it so well at HYCON..!

Therefore we have gathered a number of well documented facts in this catalogue, which will most likely make you see things differently and arouse your interest in many benefits of good equipment from HYCON.

The HYCON HH-series is a complete line of handheld, hydraulic breakers. The breakers are characterized by superior performance compared to conventional electric and pneumatic tools, and the HH-series is among the best performing on the market. With a HYCON breaker the job is done faster, more efficiently, and you save time and money from day one.

Our tools, such as ringsaws, cut-off saws and core drills, are characterized by ultimate quality and durability. Make no mistake about the weight: HYCON Tools gives you a very low operating weight with maximum power..!


The HYCON HH-series, the HYCON Tools and the HYCON HPP-powerpacks are designed and made in Denmark. They are made for tough breaking jobs under extreme working conditions. We make no compromises in technique and design, and we use only the best and strongest components to ensure unique functioning and long lifetime of our tools.

HYCON is handmade quality, and works irrespective of weather conditions, does not freeze up in the winter and can also be used under water!




"The Fuel-Saver" versus traditional compressor...



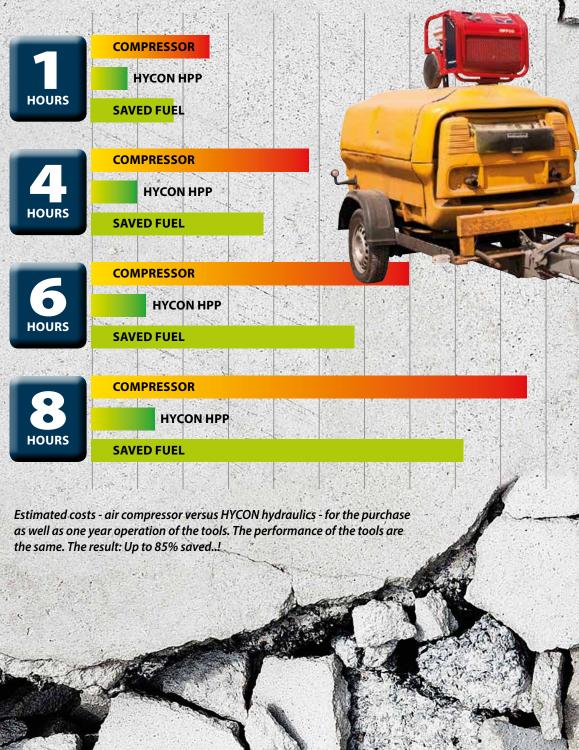





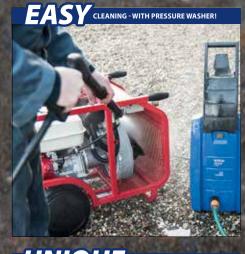











Higher efficiency, robust design and low weight..!

The hydraulic HYCON HPP-powerpacks are the power source of the HYCON hydraulic system. The series of powerpacks complies with any demand on an efficient power source - irrespective of the size, the nature and the difficulty of the jobs. The HPP-powerpacks are characterized by a simple and sturdy modular construction with few wearing parts and an easily-accessible and user-friendly design. The individual components of the powerpacks have been carefully selected after thorough tests on our testing facilities, and the entire HPP-series has a unique quality and therefore a high reliability.

No instructions are required for the very simple operation of the powerpacks - this is one of the features that make this solution very suitable for the rental business. The HYCON hydraulic system ensures flexibility, more power - and fuel consumption much lower than a compressor..!

























HYCON breakers: Raw power at low weight...


The HYCON HH-series is the result of the strongest and most modern design on the market. Our hydraulic quality breakers have practically only two moving parts, and this ensures minimum wear and consequently much lower operating costs. The HYCON HH-series is equipped with the world's best vibration-dampening system as standard - the HYCON PROLINE handle.


This handle gives unique operator comfort with a vibration level as low as 4.8 m/s² (HH20RV), and the breaker can therefore be used efficiently 8 hours per day.

The reliability, the sturdy design and the supreme component quality of the HYCON HH-series means long life - also under extreme working conditions!






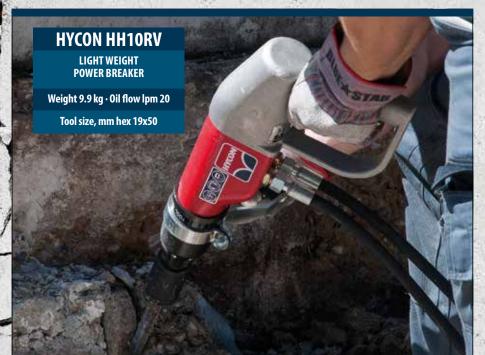


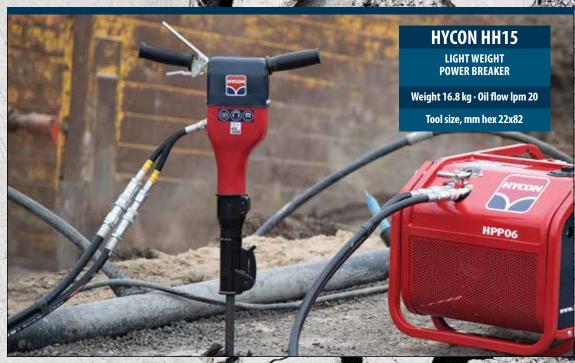





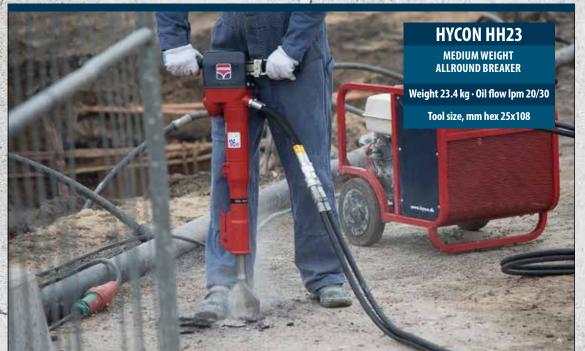

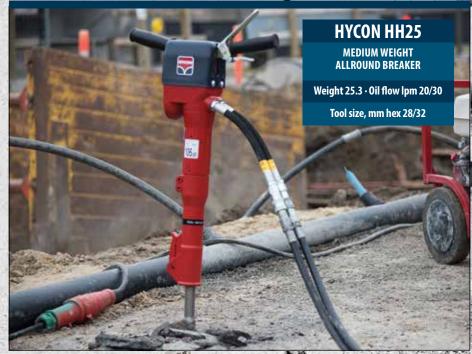







With a cutting depth of 300 mm this unique tool gives you the best cutting-economy, higher efficiency - and a lot more power..!

The HYCON hydraulic ring saw offers you the most overall efficient and productive 300 mm deep cutting. Imagine all the new work it will open up to your business and for you to carry out at minimum cost. All parts run in oil - no down time and service is next to nothing.

The HYCON ring saw has a unique design and state of the art drive mechanism that will give you many hours of use and long lasting wearing parts that will ensure you low operating cost.

Investing in a ring saw is investing in more work because it will cut 300 mm deep compared to common petrol or hydraulic circular hand saws.

It is also investing in higher efficiency because it will cut 300 mm deep resulting in less work afterwards (e.g. a doorway) and less after work means job done faster and much cheaper!

HYCON HRS400 PREMIUM Ring Saw

Cut any concrete, bricks, stone, etc.

also with rebar in 300 mm depth

Cutting of openings for doors

and windows, cutting of pipes, etc.

Under water jobs

Very powerful - up to 18 HP

ASCO Safety System

Long lifetime - all parts run in oil

Ergonomic design - operator comfort

Easy change of blades

Lower vibrations and weight





The HYCON Cut-off Saw PREMIUM is available in 4 versions: HCS14, HCS16, HCS18 and HCS20. All types can be used for horizontal and vertical cutting. They cut all types of concrete, steel, brick wall, asphalt etc.

The HYCON Cut-off saw is a very sturdy tool intended for cutting even under the most extreme conditions. It is completely unaffected by water and dust, and all parts run in oil. The HYCON PREMIUM-saws are built for hard use day after day - without breakdowns. The fact, that the saw is always working and does not require service means higher profits than with e.g. a petrol saw.

The cut-off saw offers top safety with the built-in ASCO System (Automatic Safety Cut off).
The tool automatically cuts off if the disc jams - no injury to the operator.

HYCON Cut-off Saw PREMIUM-Series

Low weight - from only 7.4 kg

30% more power - 0% maintenance..!

ldeal for pre-cutting

Superior built quality - perfectly balanced

Maintain full torque in lifetime

Stronger shaft and bearings

Slim design - get close to corners

Work under water

No airfilter - No belt

ASCO safety (Automatic Safety Cut Off





With a hydraulic handheld core drill you will achieve a significant improvement of your profits as there are no costs for setting up a rig. Furthermore, the performance of the core drill allows for drilling of holes up to ø350 mm in all materials - also with reinforcement. Therefore it is only necessary to invest in ONE core drill for many different kinds of jobs.

All parts run in oil - a guarantee for long life and low service costs. The tool is totally unaffected by water, dust etc. The core drill offers top safety with the built-in ASCO System (Automatic Safety Cut off). The tool automatically cuts off if the core bit jams - no injury to the operator.

Plumbing





Electricians



Renovation



Advantages:

Freehand drilling - No rig required

Small and compact/low weight - Drills everywhere

No instructions needed - Can be used by everybody


No vibrations - no petrol engine - High operator comfort

Variable rotary speed - Easy drill start

Closed system - No problems with dirt in the system



350 mm

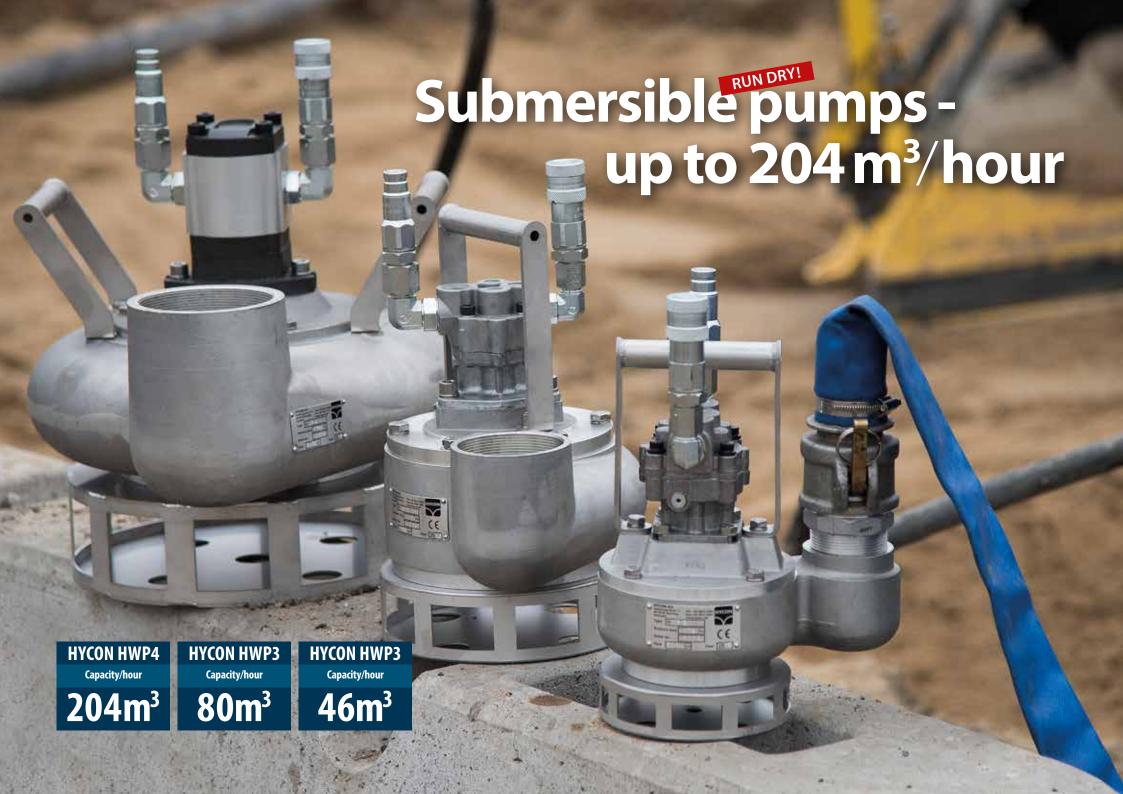



HYCON Submersible pumps: High quality and performance. Run dry without damage..!

The HYCON submersible pump is a VOR-TEX pump. VORTEX pumps are designed especially for dirty water with even very large solids.


The impeller at top sets the water in a circular movement and by centrifugal force a centre of air shaped like a cone will occur. This way there is very little contact between the water and the impeller, and wear is greatly reduced compared to other types of pumps.

In other types of pumps the water is pumped directly by the impeller, which is therefore worn much faster. Pumps of the special VORTEX design have longer lifetime and can pump larger solids.







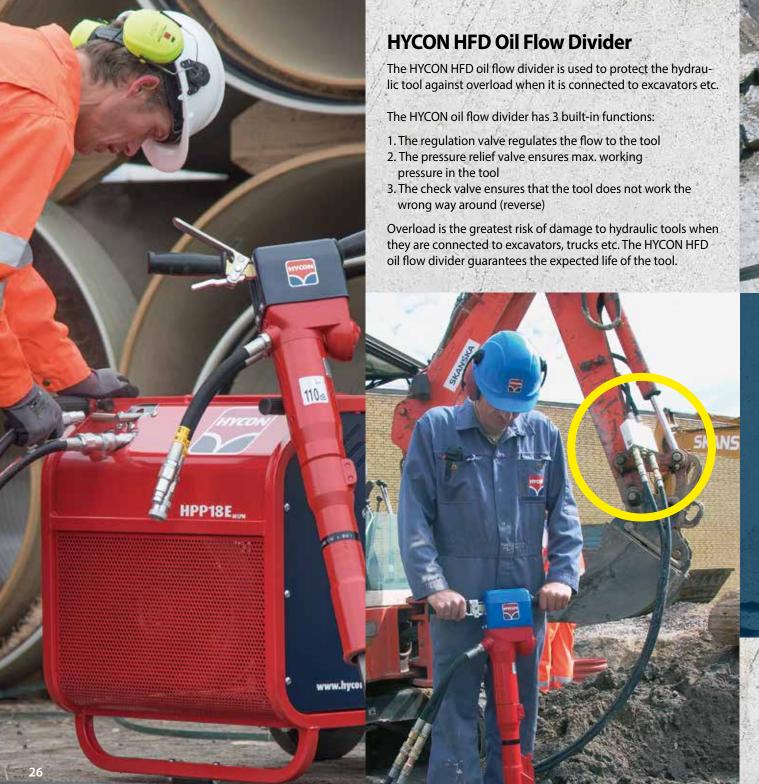



HYCON HRD20 Rock Drill

The HYCON HRD20 rock drill is the only tool on the market with built in air flushing and 4 different settings of blow frequency and rotations. The investment in a HYCON HRD20 rock drill and a HYCON powerpack is therefore the best investment on the market.

The rock drill is characterized by a very high performance in relation to weight, and its high quality means long life. The drill rods are hex 22x108 mm, and therefore all standard drills can be used.

The rock drill can be connected to a HYCON powerpack or excavators or the like.

Maximum recommended drilling performance is \emptyset 45mm and approx. 3m deep. Depending on the circumstances, the rock drill can reach a drilling speed of $3\frac{1}{2}$ - 10 cm per minute.

HYCON HBU630 - Pressure Booster



The perfect ad-on device when you need to increase standard hydraulic pressure to higher pressure for operation of high pressure tools such as crimping tool, crushers, splitters and tightening tools.

The HYCON Tools

The hydraulic system is completed by the series of HYCON professional tools. They are compact and lightweight tools - all with extremely high performance! The tool line is thoroughly tested as a result of a number of customer demands, focusing on key words like profitability and ultimate reliability.

	HYCON HRS400 PREMIUM Ring Saw	
	Weight w/o blade, kg	10.2
	Diamond blade, mm	400
	Cutting depth, mm	300
	Oil flow, l.p.m	30-40
	Working pressure, max bar	160
	Vibration level (3 axis) m/s ²	2.5
	Noise level 1 m L _{PA} dB	109
۱	Cutting speed, m/s	37-49
į	Rotation r.p.m. 1	750-2350

HYCON HCS Cut-off Saw	HCS14 Premium	HCS16 Premium	HCS18 Premium	HCS20 Premium
Disc size	14"/ø350 mm	16"/ø400 mm	18"/ø450 mm	20"/ø510 mm
Oil flow, l.p.m.	20-30	20-40	20-40	30-40
Working pressure, bar	120	120	120	120
Max. pressure, bar	172	172	172	172
Weight w/o hose/disc, kg	7.4	7.8	8.1	9.2
Cutting depth, mm (1	137	162	187	212
Noise level L _{PA} dB	105	97	99	99
Noise level L _{wA} dB	116	108	110	110
Vibration level, m/s	< 2.5	< 2.5	< 2.5	< 2.5

HYCON HFD Oil Flow Divider		
Pressure relief valve		
(power source), bar	Max. 240	
Oil flow in (power source), l.p.m.	Max. 80	
Pressure relief valve, bar	160	
Oil flow out, l.p.m.	20, 30 or 40	
The oil flow is regulated by interchangeable		
nozzles. Standard is 20 l.p.m.		

HYCON Core Drill		
Oil flow, l.p.m.	20	
Working pressure, bar	100	
Max. pressure, bar	170	
Weight, kg	7.6	
r.p.m./drilling diameter		
HCD25-100	1500/ø25-ø100 mm	
HCD50-200	600/ø50-ø350 mm	
Core bits	Standard 1¼" UNC	
Noise level L _{PA} dB		
HCD25-100	84	
HCD50-200	80	
Vibration level, m/s²	< 2.5	

HYCON HWP Submersible Pump	
HWP2 oil flow, l.p.m.	20-30
HWP3 oil flow, l.p.m.	20-30
HWP4 oil flow, l.p.m.	20-40
Max. pressure HWP2/3/4, bar	172
HWP2 weight, kg	7.7
HWP3 weight, kg	11
HWP4 weight, kg	26.7
HWP2 capacity/hour	46 m³
HWP3 capacity/hour	80 m ³
HWP4 capacity/hour	204 m ³

HYCON Post Driver	
Weight post driver, kg	28.2
Oil flow, l.p.m	20-30
Working pressure, bar	100
Max. pressure relief valve, bar	160
Vibration level (3 axis) m/s ²	9.4
Noise level 1 m L _{PA} dB	96
Adaptors:	
Square, max.	105 x 105 mm
Round max.	130 mm
Other sizes/profiles	On request
Remote valve	Optional

HYCON HRD20 Rock Drill		
Weight, kg	20	
Oil flow, l.p.m	25-30	
Working pressure, bar	115	
Max. pressure, bar	150	
Tool chuck size, mm he	ex 22x108	
Rotation	Counterclockwise	
Air supply	max. 0.08 m ³ /min. / 2 bar	
Noise level 1 m L _{PA} dB	95	
Noise level 1 m L _{PA} dB Noise level L _{WA} dB	95 107	
r _A		

Hydraulic Powerpack H	HPP06 - Gasoline
Oil flow, l.p.m.	1x18
Max. pressure, bar	110
Engine	Honda 6.5 HP gasoline
POR/adjustable	Adjustable
Starter	Recoil
Weight, kg	54
Noise level 1 m L _{PA} dB	88
Noise level L _{wA} dB	100

Hydraulic Powerpack HPP09 - Gasoline		
Oil flow, l.p.m.	1x20	
Max. pressure, bar	150	
Engine	Honda 9 HP gasoline	
POR/adjustable	POR	
Starter	Recoil	
Weight, kg	68	
Noise level 1 m L _{PA} dB	88	
Noise level L _{wa} dB	100	

Hydraulic Powerpack HPP13 FLEX - Gasoline		
Oil flow, l.p.m.	1x20-30	
Max. pressure, bar	150	
Engine	Honda 13 HP gasoline	
POR/adjustable	Adjustable	
Starter	Recoil	
Weight, kg	81	
Noise level 1 m L _{PA} dB	89	
Noise level L _{wA} dB	101	
	The second secon	

14	CONTRACTOR OF THE PARTY OF THE	
ij	Oil flow, l.p.m.	1x20-30-40
	Max. pressure, bar	160
	Engine	Vanguard 18 HP gasoline
í	POR/adjustable	Adjustable
	Starter	Recoil and electric
Ì	Weight, kg	108
1	Noise level 1 m L _{PA} dB	89
Ì	Noise level L _{wa} dB	101
		The state of the s

Hydraulic Powerpack HPP18V FLEX - Gasoline

Hydraulic Powerpack HP	P18VMF - Gasoline
Oil flow, l.p.m.	1x10-15-20-30-40
	2x10-15-20
Max. pressure, bar	160
Engine B&S Va	nguard 18 HP gasoline
POR/adjustable	Adjustable
Starter	Recoil and electric
Weight, kg	112
Noise level 1 m L _{PA} dB	89
Noise level L _{wA} dB	101
	A STATE OF

Hydraulic Powerpack HPP27VMF - Gasoline		
Oil flow, l.p.m.	1x15-20-30-40-60	
	2x15-20-30	
Max. pressure, bar	160	
Engine	B&S Vanguard 27 HP gasoline	
POR/adjustable	Adjustable	
Starter	Electric	
Weight, kg	170	
Noise level	n/a	
Only for sale outsid	e EU	
White the		

Hydraulic Powerpack HPP13D FLEX - Diesel	
Oil flow, l.p.m.	1x20-30
Max. pressure, bar	150
Engine	Lombardini 11 HP diesel
POR/adjustable	Adjustable
Starter	Recoil and electric
Weight, kg	114
Noise level 1 m L _{PA} dB (2	0 l.p.m.) 93
Noise level L _{wa} dB (20 l.p	o.m.) 105
Only for sale outside EU	

	Hydraulic Powerpack HPP26DMF - Diesel	
	Oil flow, l.p.m.	1x15-20-30-40-60
篇		2x15-20-3
	Max. pressure, bar	160
	Engine Lombardini, Water c	ooled, 3 cyl, 26 HP diesel
9	POR/adjustable	Adjustable
S	Starter	Electric
	Weight, kg	230
Š	Noise level	n/a
	Only for sale outside EU	

	2 2 miles	
Hydraulic Powerpack HPP26D - Diesel		
Oil flow, I.p.m.	1x20-46 l.p.m.	
Max. pressure, bar	170	
Engine Lombardini, Water cod	oled, 3 cyl, 26 HP diesel	
POR/adjustable	Adjustable	
Starter	Electric	
Weight, kg	230	
Noise level	n/a	
Only for sale outside EU		

Hydraulic Powerpack	HPP09E - Electric
Oil flow, l.p.m.	1x20
Max. pressure, bar	150
Motor	5.5 kW 16A/3x400V 50 Hz
POR/adjustable	no
Starter	Electric
Weight, kg	80
Noise level 1 m L _{PA} dB	85
Noise level L _{wA} dB	97

Hydraulic Powerpack HPP18E - Electric	
Oil flow, l.p.m. 1x30 or 1x40	
Max. pressure, bar 160	
Motor 11 kW 25A (30 lpm), 35A (40 lpm)/3x400V 50 Hz	
POR/adjustable no	
Starter	Electric
Weight, kg	128
Noise level 1 m L _{PA} dB	86
Noise level L _{wa} dB	98

Hydraulic Powerpack HPP 18E FLEX - Electric	
Oil flow, l.p.m.	1x20-30-40-(46*)
Max. pressure, bar	160
Motor 13,2kW 25/	A/3x400/480V 50/60Hz
POR/adjustable	Frequency converter
Starter	Electric
Weight, kg	135
Noise level 1 m L _{PA} dB	86
Noise level L _{wA} dB	98
*) Only for sale outside EU	





Hydraulic Breaker HH20	
Weight, kg	22
Oil flow, l.p.m.	20
Working pressure, bar	110
Max. pressure, bar	160
Blow frequency, 1/min.	1560
Noise level 1 m L _{PA} dB	94
Noise level L _{wa} dB	106
Vibration level (3 axis) m/s ²	6.8
Tool size, mm hex	25x108

Hydraulic Breaker HH25	20/30 l.p.m.
Weight, kg	25.3/25.8
Oil flow, l.p.m.	20/30
Working pressure, bar	120/120
Max. pressure, bar	160/160
Blow frequency, 1/min.	1380/1380
Noise level 1 m L _{PA} dB	96/96
Noise level L _{wA} dB	108/108
Vibration level (3 axis) m/s ²	9.4/9.4
Tool size, mm hex	28/32
CARCA TO A COLUMN TO SERVICE AND A COLUMN TO A COLUMN	

Hydraulic Breaker HH10RV	
Weight, kg	9.9
Oil flow, l.p.m	20
Working pressure, bar	100
Max. pressure, bar	160
Blow frequency, 1/min.	2100
Noise level 1 m L _{PA} dB	93
Noise level L _{wa} dB	105
Vibration level (3 axis) m/s ²	9.6
Tool size, mm hex	19x50

Hydraulic Breaker HH20RV	
Weight, kg	23.9
Oil flow, l.p.m.	20
Working pressure, bar	110
Max. pressure, bar	160
Blow frequency, 1/min.	1560
Noise level 1 m L _{PA} dB	94
Noise level L _{wA} dB	106
Vibration level (3 axis) m/s ²	4.8
Tool size, mm hex	32x160

Hydraulic Breaker HH27	30 l.p.m.
Weight, kg	27.4
Oil flow, I.p.m.	30
Working pressure, bar	130
Max. pressure, bar	160
Blow frequency, 1/min.	1260
Noise level 1 m L _{PA} dB	98
Noise level L _{wA} dB	110
Vibration level (3 axis) m/s ²	10.7
Tool size, mm hex	28/32
A STATE OF THE PARTY OF THE PAR	CONTRACTOR STATE OF THE PROPERTY OF THE PARTY OF THE PART

Hydraulic Breaker HH15	
Weight, kg	16.8
Oil flow, l.p.m	20
Working pressure, bar	100
Max. pressure, bar	160
Blow frequency, 1/min.	1830
Noise level 1 m L _{PA} dB	93
Noise level L _{wA} dB	105
Vibration level (3 axis) m/s ²	6.6
Tool size, mm hex	22x82
	The state of the s

Hydraulic Breaker HH23	20/30 l.p.m.	
Weight, kg	23.4/23.5	
Oil flow, l.p.m.	20/30	
Working pressure, bar	120/120	
Max. pressure, bar	160/160	
Blow frequency, 1/min.	1380/1380	
Noise level 1 m L _{PA} dB	96/96	
Noise level L _{wA} dB	108/108	
Vibration level (3 axis) m/s ²	8.0/8.0	
Tool size, mm hex	25x108/25x108	

Hydraulic Breaker HH35	30/40 l.p.m.
Weight, kg	29.4
Oil flow, l.p.m.	30-40
Working pressure, bar	130
Max. pressure, bar	160
Blow frequency, 1/min.	1100-1440
Noise level 1 m L _{PA} dB	99
Noise level L _{wA} dB	111
Vibration level (3 axis) m/s ²	10.7
Tool size, mm hex	28/32



HYCON has a clear defined strategy on our quality.

We want to be the leading manufacturer of the highest quality products in the market. It is our objective to reach zero failures and we are very close to reaching that objective. Customers today are very demanding in terms of high quality and it is our aim to fulfil their expectations.

We have set up a system where we have described procedures of all our actions throughout the entire production chain from selecting raw materials to the final control of each individual product. We manufacture through suppliers, but they are all supplying according to our specifications. It means we are in complete control of the manufactured quality.

All products undergo thorough end control testing according to firm control procedures and all test results are stored in a database. It is a watertight quality control system and it is working!





HYDRAULIC POWERPACK HPP

LIGHT & HEAVY DUTY BREAKERS HH

RING SAW HRS 400 PREMIUM

CUT-OFF SAWS HCS PREMIUM

CORE DRILLS HCD

SUBMERSIBLE PUMPS HWP

HYCON offers you handheld hydraulic demolition tools with high focus on operator comfort and safety, which along with fuel savings up to 85% bring contractors high profit.

Common features of our products are unique quality, superior strength and extreme durability with zero maintenance.

Our customers are contractors, utilities, municipalities, railways, demolition, rental, army and rescueteams, cutting and drilling, renovation, groundwater lowering, pumping and many more - all over the world.

DISTRIBUTOR



HYCON A/S Juelstrupparken 11 DK-9530 Støvring Tel +45 9647 5200 Fax +45 9647 5201 www.hycon.dk

